

## Cisco Catalyst Blade Switch 3120 for HP

The Cisco Catalyst<sup>®</sup> Blade Switch 3120 for HP represents the next-generation I/O solution for blade server environments. Built from the ground up on the purpose-built Cisco<sup>®</sup> hardware and market-leading Cisco IOS<sup>®</sup> Software, the Cisco Catalyst Blade Switch 3120 (Figure 1) is engineered with innovative technologies specifically designed to meet the rigors of blade server-based application infrastructure. Specifically, the switch is designed to deliver scaleable, high-performance, highly resilient blade server connectivity while supporting ongoing IT initiatives to reduce server infrastructure complexity and total cost of ownership (TCO).

**Figure 1.** Cisco Catalyst Blade Switch 3120 for HP



### Configurations

The Cisco Catalyst Blade Switch 3120 for HP has two configurations and SKUs.

#### Configuration 1: Cisco Catalyst Blade Switch 3120G for HP

- 8 Gigabit Ethernet uplink ports: 4 10/100/1000BASE-T ports and 4 Small Form-Factor Pluggable (SFP) Gigabit Ethernet ports

#### Configuration 2: Cisco Catalyst Blade Switch 3120X for HP

- 4 10/100/1000BASE-T ports and 2 X2-based 10 Gigabit Ethernet ports
- The Cisco TwinGig Converter Module can be used in place of X2 modules. The Cisco TwinGig module converts a single 10 Gigabit Ethernet X2 interface into two Gigabit Ethernet SFP ports.


### Virtual Blade Switch (VBS) Technology

With the Cisco Catalyst Blade Switch 3120, Cisco introduces a unique technology called the virtual blade switch (VBS). This switch virtualization technology treats the interconnected physical switches within a rack as one logical switch.

#### Main Benefits of VBS Technology

- VBS reduces infrastructure complexity, improves network resiliency, and increases the operational manageability of the blade-switching environment.
- VBS offers exceptional scalability by providing up to 160 Gbps of upstream bandwidth.
- VBS can increase the bandwidth available to a server eightfold.
- Because the VBS appears as a single node, both the Layer 2 and Layer 3 topologies are greatly simplified, increasing fabric stability and reducing convergence times after a topology change.
- The capability to mix-and-match 10 Gigabit Ethernet switches provides customers with a cost-effective migration path. In addition, the advanced operations and troubleshooting tools reduce operating expenses.

**Figure 2.** Switches interconnected in a rack are treated as a single logical switch

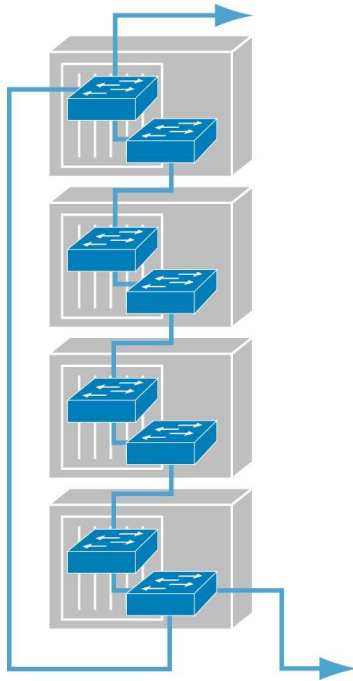

Cisco blade switches provide an easy, smart, and flexible blade server I/O solution that allows customers to reap the full benefits offered by the blade server architecture:

- **Easy:** Easy to operate and deploy
  - Because there are fewer switches to manage with VBS technology, helps solve the problem of switch sprawl
  - Provides consistent management interface and tools throughout the Cisco data center and blade switch portfolio, accelerating service provisioning and simplifying troubleshooting
  - Through VBS technology, provides operational transparency and efficiency during replacement and addition of switches
- **Smart:** Feature-rich, “server-smart” networking solution
  - Provides highly resilient LAN uplinks to increase blade server and virtual machine availability using innovations such as trunk failover and EtherChannel
  - Helps secure application servers and virtual machines using private VLANs and access control lists (ACLs)
  - Provides intelligent congestion management mechanisms to optimize network bandwidth using quality of service (QoS)
  - Provides advanced Layer 2 and 3, IPv4 and IPv6, and multicast capabilities to facilitate smart end-to-end server networking in the data center
- **Flexible:** Flexible solution to scale resources and facilitate data center virtualization
  - Through VBS, provides flexibility to configure network topology based on application needs such as performance, scalability, and resiliency
  - Through VBS, provides investment protection and a flexible transition path with the capability to mix and match Gigabit Ethernet and 10 Gigabit Ethernet switches
  - Provides flexible options for configuration and management such as a command-line interface (CLI) and a GUI

## Cisco Catalyst Blade Switch 3120 Software

The Cisco Catalyst Blade Switch 3120 ships with the IP Base feature set. The IP Base feature set includes advanced QoS, a suite of security features, rate-limiting, ACLs, and basic static and Routing Information Protocol (RIP) routing capability.

Customers can upgrade the software to the IP Services feature set. The IP Services feature set provides a richer set of enterprise-class features, including advanced hardware-based IP unicast and multicast routing: Enhanced Interior Gateway Routing Protocol (EIGRP), Open Shortest Path First (OSPF), Border Gateway Protocol (BGP), Protocol Independent Multicast (PIM), and IPv6 routing.

### Features and Benefits

Table 1 summarizes product features and benefits.

**Table 1.** Features and Benefits

Features	Benefits
<b>Ease of use</b> <ul style="list-style-type: none"> <li>• Capability to virtualize 8 switches into 1</li> <li>• Automatic software version checking</li> <li>• Automatic configuration synchronization</li> <li>• Dynamic Trunking Protocol (DTP)</li> </ul>	<ul style="list-style-type: none"> <li>• Reduces network complexity and simplifies configuration and maintenance</li> <li>• Provides automatic configuration and versioning that enables true immediate availability (plug-and-play) capabilities during scheduled maintenance</li> </ul>
<b>Availability</b> <ul style="list-style-type: none"> <li>• Multiswitch EtherChannel</li> <li>• Trunk failover</li> <li>• FlexLeink</li> <li>• Rapid Spanning Tree Protocol (RTSP)</li> <li>• Multiple Spanning Tree (MST) Protocol</li> </ul>	<ul style="list-style-type: none"> <li>• Increases resiliency and availability during switch failures</li> <li>• Quickly reroutes traffic during uplink failures</li> <li>• Achieves convergence within 100 milliseconds (ms) during link failures</li> <li>• Provides fast convergence to reduce downtime during spanning-tree failures</li> </ul>
<b>QoS</b> <ul style="list-style-type: none"> <li>• Wire-rate QoS performance</li> <li>• Policing and rate limiting</li> <li>• Traffic shaping</li> <li>• Queuing</li> </ul>	<ul style="list-style-type: none"> <li>• Provides industry-leading mechanisms for marking, classification, and scheduling to deliver superior performance for data, voice, and video traffic, all at wire speed</li> <li>• Can prioritize traffic based on application criticality</li> <li>• Can tightly control the amount of traffic a particular server or application can send or receive</li> </ul>
<b>Security</b> <ul style="list-style-type: none"> <li>• Dynamic Address Resolution Protocol (ARP) Inspection (DAI)</li> <li>• Dynamic Host Configuration Protocol (DHCP) snooping</li> <li>• IP source guard</li> <li>• Private VLANs</li> <li>• Unicast Reverse Path Forwarding (URPF)</li> <li>• IEEE 802.1x port-based security</li> <li>• ACLs and VLAN ACLs (VACLs)</li> <li>• Secure Shell (SSH) Protocol</li> <li>• MAC address notification</li> <li>• Port security</li> <li>• Spanning Tree Protocol root guard and Bridge Protocol Data Unit (BPDU) guard</li> </ul>	<ul style="list-style-type: none"> <li>• Provides comprehensive set of security features for connectivity and access control</li> <li>• Defends the network against various smurf, "man-in-the-middle," and denial-of-service (DoS) attacks</li> <li>• Protects against excessive broadcasts and multicasts</li> </ul>
<b>High-performance IP routing</b> <ul style="list-style-type: none"> <li>• RIPv1 and v2, OSPF, EIGRP, and BGPv4</li> <li>• IPV6 RIP Next Generation (RIPng) and OSPFv3</li> <li>• Policy-based routing (PBR)</li> <li>• IP multicast routing (PIM Sparse Mode [SM], Dense Mode [DM], and Sparse-Dense Mode [SDM])</li> </ul>	<ul style="list-style-type: none"> <li>• Provides feature-rich routing options to bring Layer 3 intelligence to the access switches</li> <li>• Helps ensure effective use of bandwidth resources by supporting Layer 3 multicast</li> <li>• Better utilizes network resources through load balancing</li> </ul>

Features	Benefits
<p><b>Manageability</b></p> <ul style="list-style-type: none"> <li>• Single IP address for up to 8 switches</li> <li>• Cisco IOS Software CLI</li> <li>• SPAN and Remote SPAN (RSPAN) support</li> <li>• Layer 2 traceroute</li> <li>• Traffic statistics: Packet and error counters</li> <li>• Simple Network Management Protocol (SNMP) v1, v2, and v3</li> <li>• Remote monitoring (RMON)</li> <li>• Cisco Discovery Protocol</li> <li>• Limited support for Cisco IOS Embedded Event Manager (EEM)</li> </ul>	<ul style="list-style-type: none"> <li>• Uses the user interface and command set common to all Cisco routers and Cisco Catalyst switches</li> <li>• Can remotely monitor ports in a Layer 2 switch network from any other switch in the same network</li> <li>• Provides rich set of MIB and object identifier (OID) support for comprehensive in-band management.</li> <li>• Provides excellent troubleshooting resources, including debugging tools, logs, and counters, to enable quick diagnosis of network problems</li> </ul>
<p><b>Management tools</b></p> <ul style="list-style-type: none"> <li>• CiscoWorks LAN Management Solution (LMS)</li> <li>• Cisco Network Assistant</li> <li>• Cisco Device Manager</li> </ul>	<ul style="list-style-type: none"> <li>• Provides powerful management tools that simplify the configuration, administration, monitoring, and troubleshooting of Cisco networks</li> <li>• Improves the accuracy and efficiency of operations staff and increases the overall availability of the network</li> </ul>

**Product Specifications**

Table 2 lists hardware specifications, Table 3 lists management and standards support, and Table 4 lists safety and compliance information.

**Table 2.** Hardware Specifications

Description	Specification																																													
<b>Performance</b>	<ul style="list-style-type: none"> <li>• Up to 128-Gbps switching fabric</li> <li>• Forwarding rate based on 64-byte packets; up to 59.2 million packets per second (mpps)</li> <li>• 256 MB double-data-rate (DDR) synchronous dynamic RAM (SDRAM) and 64 MB Flash memory</li> <li>• Configurable maximum transmission units (MTUs) of up to 9018 bytes (jumbo frames)</li> <li>• MAC, routing, security, and QoS scalability numbers depend on the type of template used in the switch:</li> </ul>																																													
	<table border="1"> <thead> <tr> <th></th> <th>Default Template</th> <th>Access Template</th> <th>VLAN Template</th> <th>Routing Template</th> </tr> </thead> <tbody> <tr> <td>MAC addresses</td> <td>6K</td> <td>4K</td> <td>12K</td> <td>3K</td> </tr> <tr> <td>IGMP groups and multicast routes</td> <td>1K</td> <td>1K</td> <td>1K</td> <td>1K</td> </tr> <tr> <td>Total unicast routes</td> <td>8K</td> <td>6K</td> <td>0</td> <td>11K</td> </tr> <tr> <td>Directly connected hosts</td> <td>6K</td> <td>4K</td> <td>0</td> <td>3K</td> </tr> <tr> <td>Indirect routes</td> <td>2K</td> <td>2K</td> <td>0</td> <td>8K</td> </tr> <tr> <td>Security access control entries)</td> <td>1K</td> <td>2K</td> <td>1K</td> <td>1K</td> </tr> <tr> <td>QoS access control entries)</td> <td>0.5K</td> <td>0.5K</td> <td>0.5K</td> <td>0.5K</td> </tr> <tr> <td>PBR access control entries)</td> <td>0</td> <td>0.5K</td> <td>0</td> <td>0.5K</td> </tr> </tbody> </table>		Default Template	Access Template	VLAN Template	Routing Template	MAC addresses	6K	4K	12K	3K	IGMP groups and multicast routes	1K	1K	1K	1K	Total unicast routes	8K	6K	0	11K	Directly connected hosts	6K	4K	0	3K	Indirect routes	2K	2K	0	8K	Security access control entries)	1K	2K	1K	1K	QoS access control entries)	0.5K	0.5K	0.5K	0.5K	PBR access control entries)	0	0.5K	0	0.5K
		Default Template	Access Template	VLAN Template	Routing Template																																									
	MAC addresses	6K	4K	12K	3K																																									
	IGMP groups and multicast routes	1K	1K	1K	1K																																									
	Total unicast routes	8K	6K	0	11K																																									
	Directly connected hosts	6K	4K	0	3K																																									
	Indirect routes	2K	2K	0	8K																																									
	Security access control entries)	1K	2K	1K	1K																																									
	QoS access control entries)	0.5K	0.5K	0.5K	0.5K																																									
PBR access control entries)	0	0.5K	0	0.5K																																										
<b>Connectors and cabling</b>	<p>SKU 1: Cisco Catalyst Blade Switch 3120G</p> <ul style="list-style-type: none"> <li>• Supports up to 8 Gigabit Ethernet uplink ports: 4 10/100/1000BASE-T ports and 4 SFP-based Gigabit ports (using Cisco TwinGig Converter Modules)</li> </ul> <p>SKU 2: Cisco Catalyst Blade Switch 3120X</p> <ul style="list-style-type: none"> <li>• Supports up to 4 10/100/1000BASE-T ports and 2 X2-based 10 Gigabit ports</li> <li>• SFP and X2 cage supports only SFP and X2 modules from Cisco</li> </ul> <p>Common on both SKUs</p> <ul style="list-style-type: none"> <li>• 4 external 10/100/1000BASE-T ports</li> <li>• Management console port: RJ-45-to-DB9 cable for PC connections</li> <li>• 2 high-speed stack connectors</li> </ul> <p>Table 5 later in this document lists supported X2 modules.</p>																																													
	<b>Power consumption</b>	12V at 5A (60W)																																												

Description	Specification
<b>Indicators</b>	Total of 18 LEDs on the faceplate: <ul style="list-style-type: none"> <li>• 12 LEDs for uplink port status</li> <li>• 4 switch-status LEDs</li> <li>• 2 HP-specific LEDs to indicate health and user ID (UID) status</li> </ul>
<b>Dimensions (L x W x H)</b>	10.9 in. x 7.6 in. x 1.1 in. 27.7 cm x 19.3 cm x 2.8 cm
<b>Weight</b>	Approximately 3 lb (1.36 kg)
<b>Environmental ranges</b>	<ul style="list-style-type: none"> <li>• Operating temperature: 0 to 40°C (32 to 104 F)</li> <li>• Storage temperature: -25 to 70°C (-13 to 158 F)</li> <li>• Operating relative humidity: 10 to 85% noncondensing</li> <li>• Storage relative humidity: 5 to 95% noncondensing</li> </ul>
<b>Predicted mean time between failure (MTBF)</b>	Approximately 387,000 hours

**Table 3.** Management and Standards Support

Description	Specification
<b>MIB support</b>	<ul style="list-style-type: none"> <li>• BRIDGE-MIB</li> <li>• CISCO-CDP-MIB</li> <li>• CISCO-CLUSTER-MIB</li> <li>• CISCO-CONFIG-MAN-MIB</li> <li>• CISCO-ENTITY-FRU-CONTROL-MIB</li> <li>• CISCO-ENVMON-MIB</li> <li>• CISCO-FLASH-MIB</li> <li>• CISCO-FTP-CLIENT-MIB</li> <li>• CISCO-HSRP-MIB</li> <li>• CISCO-HSRP-EXT-MIB</li> <li>• CISCO-IGMP-FILTER-MIB</li> <li>• CISCO-IMAGE-MIB</li> <li>• CISCO-IP-STAT-MIB</li> <li>• CISCO-L2L3-INTERFACE-CONFIG-MIB</li> <li>• CISCO-POE-EXTENSIONS-MIB</li> <li>• CISCO-MAC-NOTIFICATION-MIB</li> <li>• CISCO-MEMORY-POOL-MIB</li> <li>• CISCO-PAGP-MIB</li> <li>• CISCO-PING-MIB</li> <li>• CISCO-PROCESS-MIB</li> <li>• CISCO-RTTMON-MIB</li> <li>• CISCO-STP-EXTENSIONS-MIB</li> <li>• CISCO-SYSLOG-MIB</li> <li>• CISCO-TCP-MIB</li> <li>• CISCO-VLAN-IFTABLE-RELATIONSHIP-MIB</li> <li>• CISCO-VLAN-MEMBERSHIP-MIB</li> <li>• CISCO-VTP-MIB</li> <li>• ENTITY-MIB</li> <li>• ETHERLIKE-MIB</li> <li>• IF-MIB</li> <li>• IGMP-MIB</li> <li>• IPMROUTE-MIB</li> <li>• OLD-CISCO-CHASSIS-MIB</li> <li>• OLD-CISCO-FLASH-MIB</li> <li>• OLD-CISCO-INTERFACES-MIB</li> <li>• OLD-CISCO-IP-MIB</li> <li>• OLD-CISCO-SYS-MIB</li> <li>• OLD-CISCO-TCP-MIB</li> <li>• OLD-CISCO-TS-MIB</li> <li>• OSPF-MIB (RFC 1253)</li> <li>• PIM-MIB</li> <li>• RFC1213-MIB</li> <li>• RFC1253-MIB</li> <li>• RMON-MIB</li> <li>• RMON2-MIB</li> <li>• SNMP-FRAMEWORK-MIB</li> <li>• SNMP-MPD-MIB</li> <li>• SNMP-NOTIFICATION-MIB</li> <li>• SNMP-TARGET-MIB</li> <li>• SNMPv2-MIB</li> <li>• TCP-MIB</li> <li>• UDP-MIB</li> </ul>

Description	Specification
<b>Standards</b>	<ul style="list-style-type: none"> <li>• IEEE 802.1s</li> <li>• IEEE 802.1w</li> <li>• IEEE 802.1x</li> <li>• IEEE 802.3ad</li> <li>• IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports</li> <li>• IEEE 802.1D Spanning Tree Protocol</li> <li>• IEEE 802.1p CoS Prioritization</li> <li>• IEEE 802.1Q VLAN</li> <li>• IEEE 802.3 10BASE-T specification</li> <li>• IEEE 802.3u 100BASE-TX specification</li> <li>• IEEE 802.3ab 1000BASE-T specification</li> <li>• IEEE 802.3z 1000BASE-X specification</li> <li>• 1000BASE-SX</li> <li>• 1000BASE-LX/LH</li> <li>• 10GBASE-SR</li> <li>• 10GBASE-LRM</li> <li>• 10GBASE-CX4</li> <li>• 10GBASE-LX4</li> <li>• 10GBASE-LR</li> <li>• RMON I and II standards</li> <li>• SNMPv1, SNMPv2c, and SNMPv3</li> </ul>

**Table 4.** Safety and Compliance

Description	Specification
<b>Safety certifications</b>	<ul style="list-style-type: none"> <li>• UL/CUL Recognition to UL/CSA 60950-1</li> <li>• TUV Bauart to EN 60950-1</li> <li>• CB report and certificate to IEC 60950-1 with all country deviations</li> <li>• CE Marking</li> </ul>
<b>Electromagnetic compatibility certifications</b>	<ul style="list-style-type: none"> <li>• FCC Part 15 Class A</li> <li>• EN 55022 Class A (CISPR22 Class A)</li> <li>• VCCI Class A</li> <li>• AS/NZS 3548 Class A or AS/NZS CISPR22 Class A</li> <li>• MIC Class A</li> <li>• CE Marking</li> </ul>
<b>Telecommunications</b>	CLEI code
<b>Warranty</b>	90 days

## Ordering Information

Table 5 lists ordering information.

**Table 5.** Ordering Information

Part Number	Description
<b>Switches</b>	
<b>WS-CBS3120G-S</b>	Cisco Catalyst Blade Switch 3120G for HP w/ IP Base
<b>WS-CBS3120X-S</b>	Cisco Catalyst Blade Switch 3120X for HP w/ IP Base
<b>Upgrade Licenses</b>	
<b>3120-IPS-LIC</b>	Software Upgrade License for Cisco Catalyst Blade Switch 3120 to IP Services
<b>SFP Modules</b>	
<b>GLC-LH-SM=</b>	Gigabit Ethernet SFP, LC connector, long-wavelength / long-haul transceiver (single mode)
<b>GLC-T=</b>	Gigabit Ethernet SFP, RJ45 based Copper
<b>GLC-SX-MM=</b>	Gigabit Ethernet SFP, LC connector, short-wavelength transceiver (multimode)
<b>X2 and TwinGig Converter Modules</b>	

Part Number	Description
<b>CVR-X2SFP</b>	TwinGig Converter Module
<b>X2-10GB-CX4=</b>	10GBASE-CX4 X2 Module
<b>X2-10GB-SR=</b>	10GBASE-SR X2 Module
<b>X2-10GB-LRM=</b>	10GBASE-LRM X2 Module
<b>X2-10GB-LX4=</b>	10GBASE-LX4 X2 Module
<b>X2-10GB-LR=</b>	10GBASE-LR X2 Module
<b>Cisco SMARTnet® Options</b>	
<b>CON-SNT-CBS3120G</b>	Cisco SMARTnet with 8x5 next business day (NBD) hardware advance replacement
<b>CON-SNTE-CBS3120G</b>	Cisco SMARTnet with 8x5 4-hour hardware advance replacement
<b>CON-SNTP-CBS3120G</b>	Cisco SMARTnet with 24x7 4-hour hardware advance replacement
<b>CON-S2P-CBS3120G</b>	Cisco SMARTnet with 24x7 2-hour hardware advance replacement
<b>CON-SNT-CBS3120X</b>	Cisco SMARTnet with 8x5 next business day (NBD) hardware advance replacement
<b>CON-SNTE-CBS3120X</b>	Cisco SMARTnet with 8x5 4-hour hardware advance replacement
<b>CON-SNTP-CBS3120X</b>	Cisco SMARTnet with 24x7 4-hour hardware advance replacement
<b>CON-S2P-CBS3120X</b>	Cisco SMARTnet with 24x7 2-hour hardware advance replacement

**Note:** There are two additional switch part numbers: WS-CBS3125G-S and WS-CBS3125X-S. WS-CBS3125G-S is the same product as WS-CBS3120G-S, and WS-CBS3125X-S is the same product as WS-CBS3120X-S. These switches also have corresponding upgrade licenses and Cisco SMARTnet options.

## Service and Support

Cisco is committed to reducing TCO and offers technical support services to help ensure that Cisco products operate efficiently, remain highly available, and benefit from the most up-to-date system software. Table 6 describes service and support that is available directly from Cisco and through resellers.

**Table 6.** Service and Support

Technical Support Service	Features	Benefits
<b>Cisco SMARTnet Service</b>	<ul style="list-style-type: none"> <li>• Access to Cisco IOS Software updates</li> <li>• Web access to technical support tools and repositories</li> <li>• 24-hour telephone support through the Cisco Technical Assistance Center (TAC)</li> <li>• Advance replacement of hardware</li> </ul>	<ul style="list-style-type: none"> <li>• Minimizes network downtime through reliable day-to-day support and prompt resolution of critical network issues</li> <li>• Lowers TCO by using Cisco networking expertise and knowledge</li> <li>• Protects your network investment through Cisco IOS Software updates that provide patches and new functions</li> </ul>

## For More Information

For more information about Cisco products, contact:

- United States and Canada: (toll free) 800 553-6387
- Europe: 32 2 778 4242
- Australia: 612 9935 4107
- Other: 408 526-7209
- <http://www.cisco.com>

For more information about the HP c-Class BladeSystem, contact: <http://www.HP.com>.



**Americas Headquarters**  
Cisco Systems, Inc.  
San Jose, CA

**Asia Pacific Headquarters**  
Cisco Systems (USA) Pte. Ltd.  
Singapore

**Europe Headquarters**  
Cisco Systems International BV  
Amsterdam, The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

CCDE, CCENT, CCSI, Cisco Eos, Cisco HealthPresence, Cisco IronPort, the Cisco logo, Cisco Lumin, Cisco Nexus, Cisco Nurse Connect, Cisco StackPower, Cisco StadiumVision, Cisco TelePresence, Cisco Unified Computing System, Cisco WebEx, DCE, Flip Channels, Flip for Good, Flip Mino, Flip Video, Flip Video (Design), Flipshare (Design), Flip Ultra, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn, Cisco Store, and Flip Gift Card are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CQVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, iQuick Study, IronPort, the IronPort logo, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanels, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0907R)